MTS

Product of the VOLLMER Group

Software-Modul
Spezifikation „Optionen"
Stand: 15.01.25
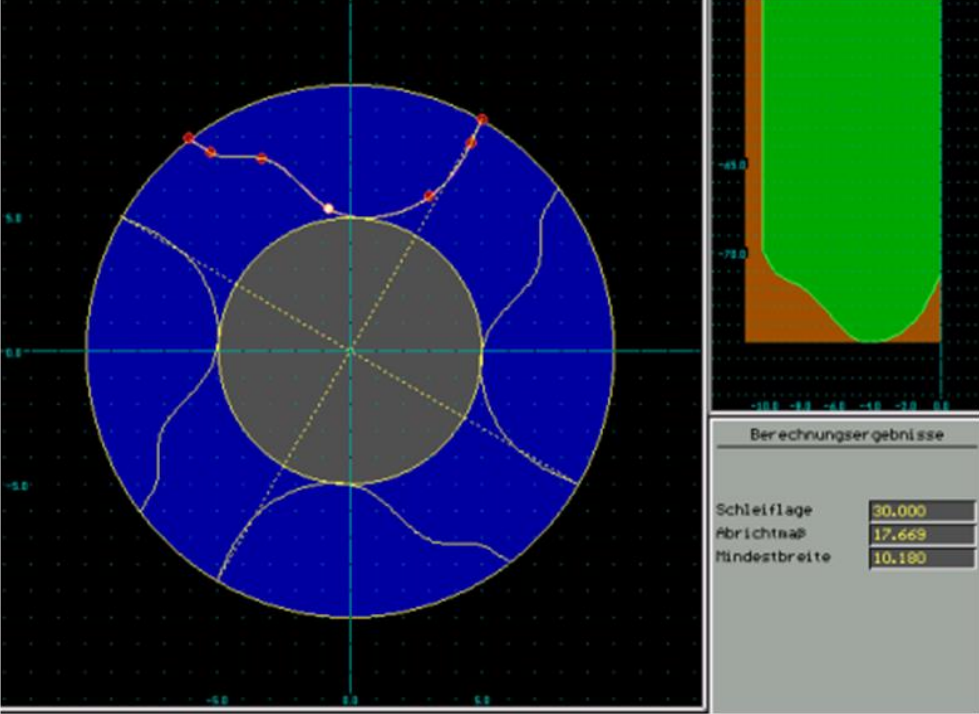
MTS

Product of the VOLLMER Group

MTS
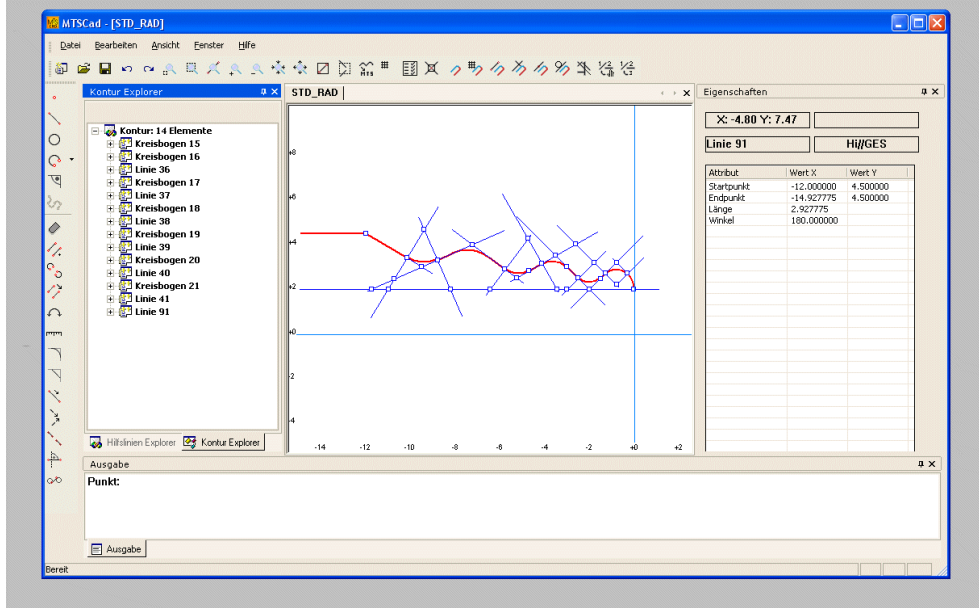
Product of the VOLLMER Group

17.1 Construction of Flute Profile / Wheel Profile	**Options for FMENU / BMENU**

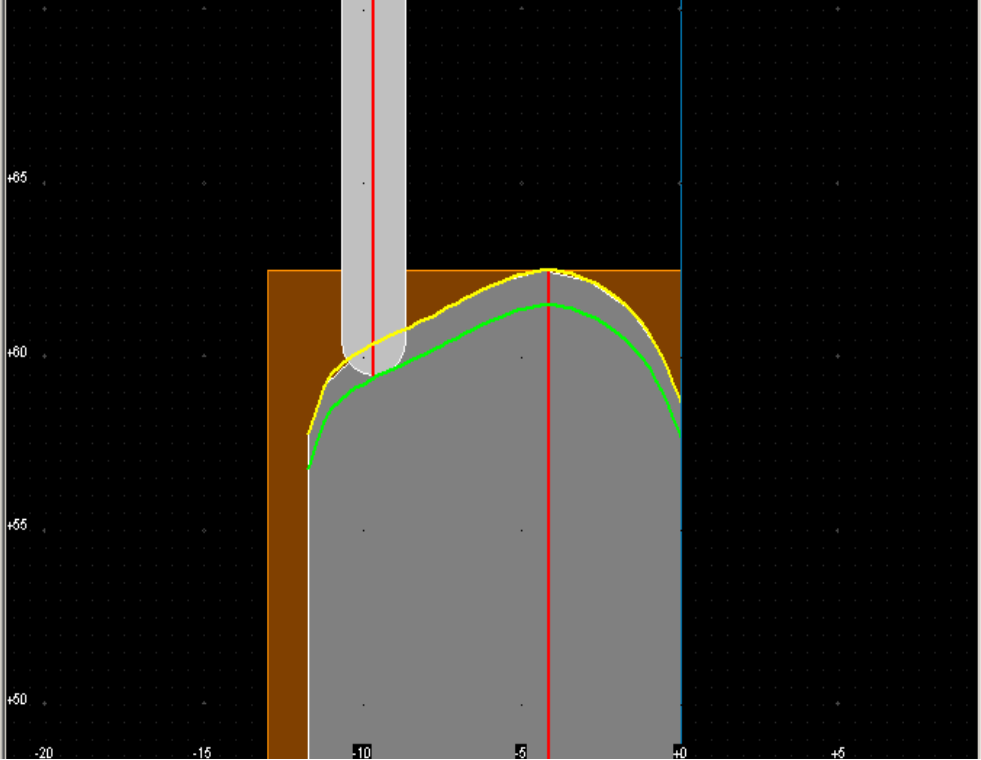| 17.1 Basic Modul Construction of Flute Profile / Wheel Profile	
• **Construction of Flute Profile:** • Construction by integr. CAD • Calculation of wheel-profile • Calculation of grinding track • Intersection simulation • Output of wheel discription	

18.1 CAD Modul

- CAD-Program specilized to the usage of tool-construction including interface to the grinding-modules.

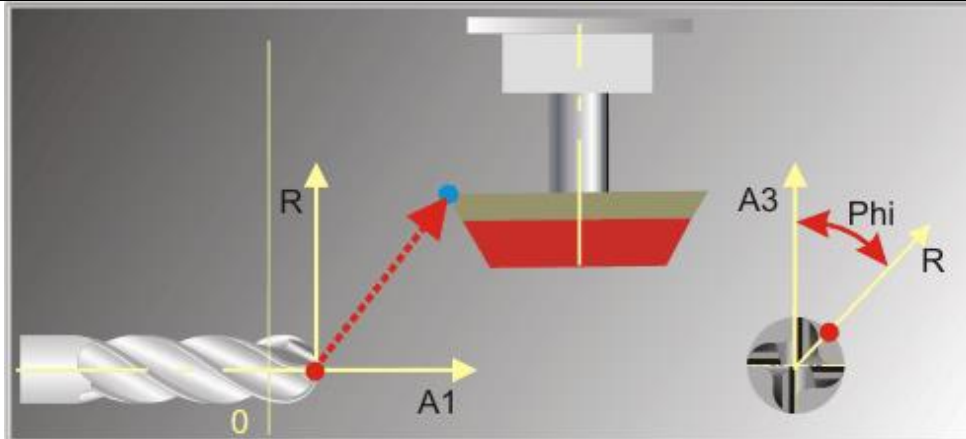| 19.1 Dressing Cycle / Wheel Profile	
- **Wheel dressing:** - Input of dressing parameter within machine world - Calculation of dressing cycle driven by given wheel profile (Pos. 19)	

MTS

Product of the VOLLMER Group

20.1 Open Procedure Genrerator
Construction and generating of selfmade additional operations. Integration at any operation-position.
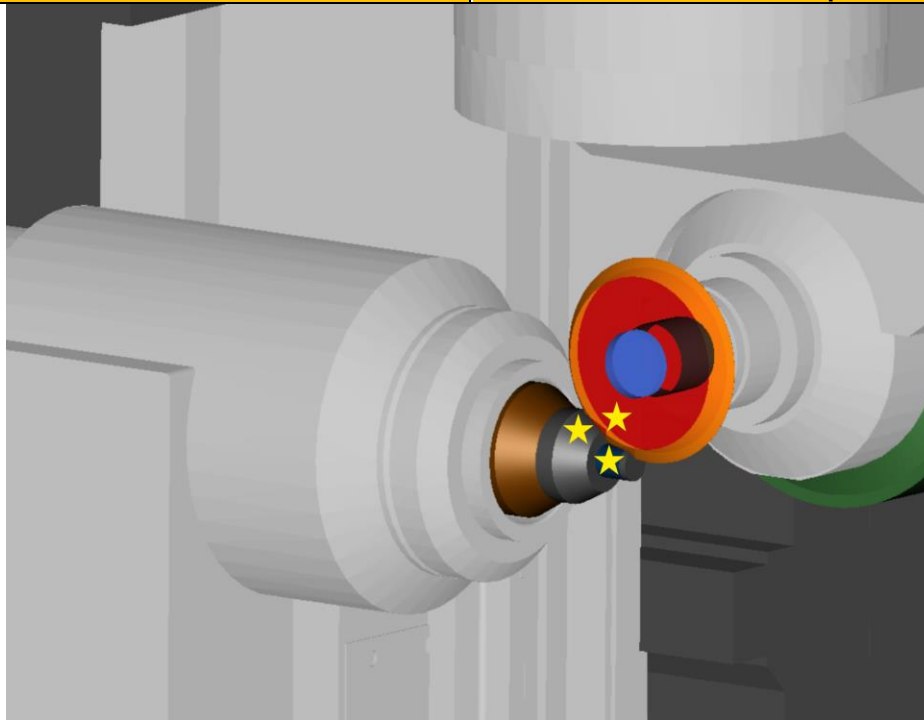
- **Generating of open procedures**:
- Graphical construction of open procedures
- Up to 10 different additional operations per modul
- Import/Export by global database
- Inserting at any position within machining order
- Seperate wheel and technology to each open procedure
- Movement- and intersection-simulations

MTS

Product of the VOLLMER Group

21.1 Basic Modul CNC-Collision-Control

- **Functions:**
  NC_start without collision-control
  NC_start with collision-control
  and auto stop at first collision.
  NC_start with collision-control and
  collision protocoll of all situations
  NC_simulation without collision display
  NC_simulation with collision display
- **Extended CNC-Generator:**
  Collision-control: Yes / No
  Mode-selection:
  „Stop at first collision" / "All collisions"
- **Mode „Stop at first collision":**
  The modul stops the calculation of the
  CNC-code by recognition of the 1st
  collision and shows these graphically on
  the scope
- **Mode „All collisions":**
  First the CNC code will be calculated
  completely. Subsequently we will have a
  listing of all collision situations.
  In the following these can be individually
  plotted and examined.

- **Administration of the collision objects
  (Setup):**
  4 object lists:
  Basical objects, tool-objects, clamping-
  and spindle-objects.
  The list administration takes place in
  each case by inserting, copying,
  renaming or deleting. The selection of
  the objects which can be considered
  concerning the collision takes place via
  activating in the object lists.
- **Collision calculation:**
  Examining the penetration of all
  activated objects, as well as the active
  grinding wheel outside of the workpiece.
  Generating the collision protocol.

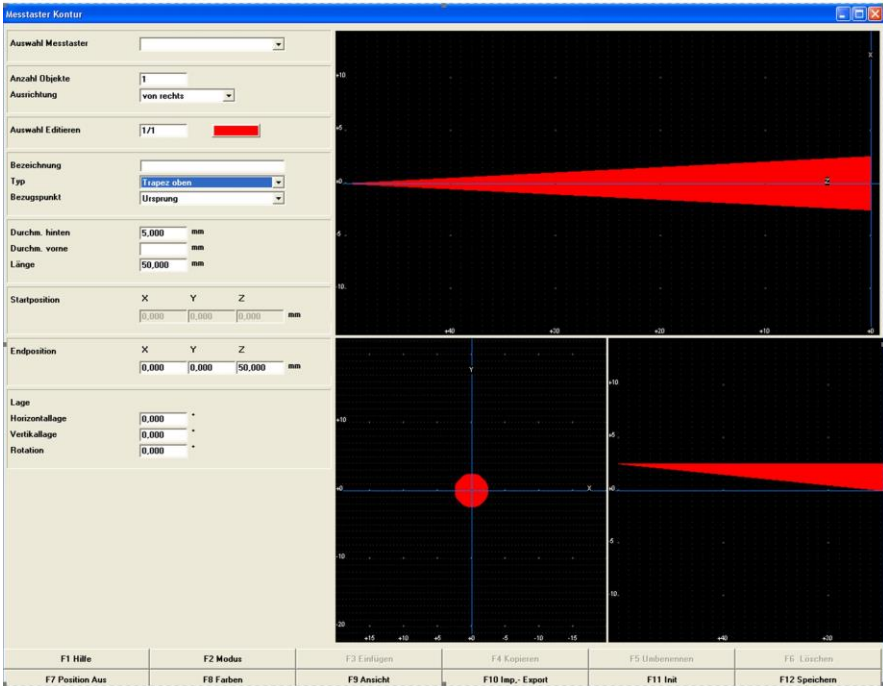| 22.1 *tool-kit 3D-view 2.0*	Option for all Moduls
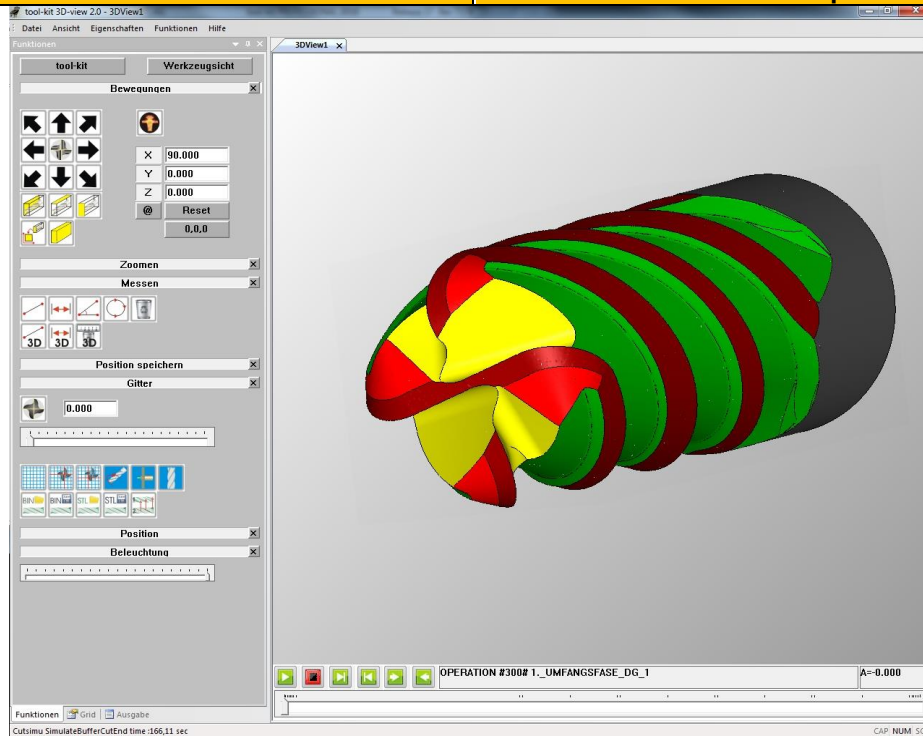
22.1 Basic Modul *tool-kit 3D-view 2.0*	

- **Tool-simulation in 3D**
  Integrated call of 3D-simulation from all moduls including 3D simulation view
  Positioning of the workpiece in three Rotary axes (3D view).
  Save 3D views.
  2D grid and 2D measurement (distance, angle, radius).
  3D measurement (points, distance).
  Section plane display
  Snap2Point feature.
  Refining function for cutouts.
  Transparency view
  Adding operations (not everything new count).
  Loading STL blanks.
  Save as STL file. Display of STEP files

| 23.1 Basic Modul Measurement-Cycles | |

- **Measurement-Cycles for 3D-probing-system**
  Length
  Tooth-positioning
  Helix lead (zylindrical, conical)
  Diameter (zylindrical, conical)
  Teeth-indexing

24.1 MTS-interface to an external Measurement-Machine	
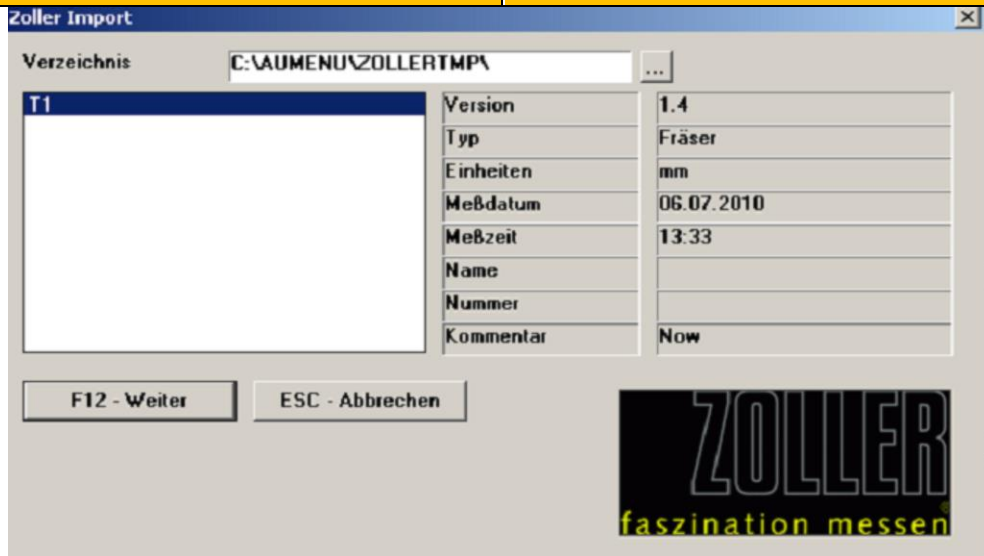
24.1 MTS-interface to an external Measurement-Machine	

- Interface within tool-kit PROFESSIONAL to a measurement-maschine (Exp. Zoller genius 3).
- Exchange of geometry data between MTS software and a measuring machine.
- Measurement of workpiece data and wheel geometry
- Reading back the measured datas
- Decision for further processing.

- Measurement-data will be read and analysed by the error-handling-procedure.
- The generated correction-data will be used in ordert to come to correct must values at next grinding step.
- Correction Options:
- **Correction on the wheel data:** Reasonable corrections f.e. at diameter, rake-angle and wheel-distance.
- **Using the operation-specifical correction table:** Corrections at machine-data or wheel-data.
- **Correction of tool parameter:** Correction in inverse direction to the actual value and setpoint.